

Electronic supplementary materials

for <https://doi.org/10.1631/jzus.A2200437>

Optimal slag content for geopolymer composites under freeze-thaw cycles with different freezing temperatures

Lifeng FAN, Weiliang ZHONG, Guang WANG, Yan XI✉

Beijing University of Technology, Beijing 100124, China

✉ Yan XI, xiyan@bjut.edu.cn

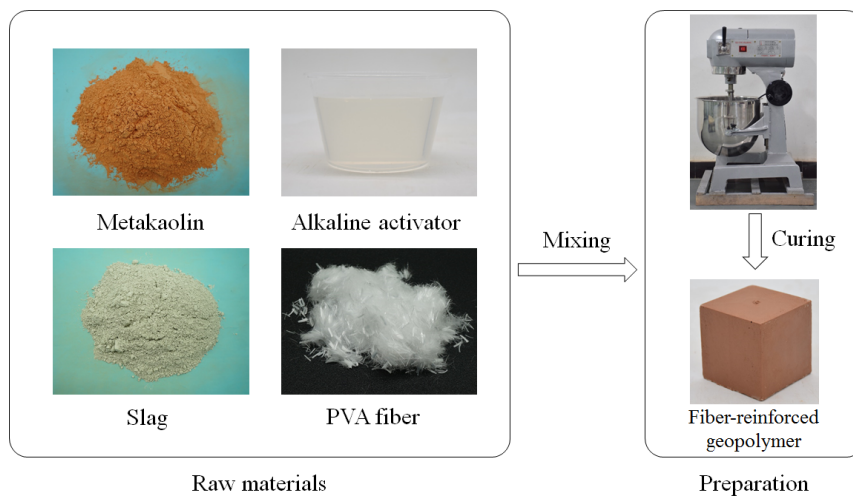


Fig. S1 The raw materials and preparation process of the fiber-reinforced geopolymer used in this study

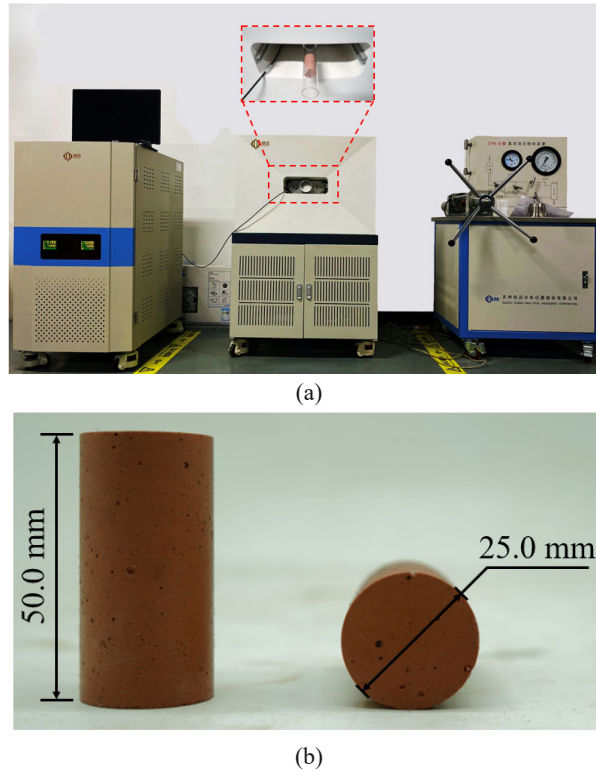


Fig. S2 The low-field nuclear magnetic resonance technique used in this study (a). The dimension of geopolymer specimen used in low-field nuclear magnetic resonance (b)

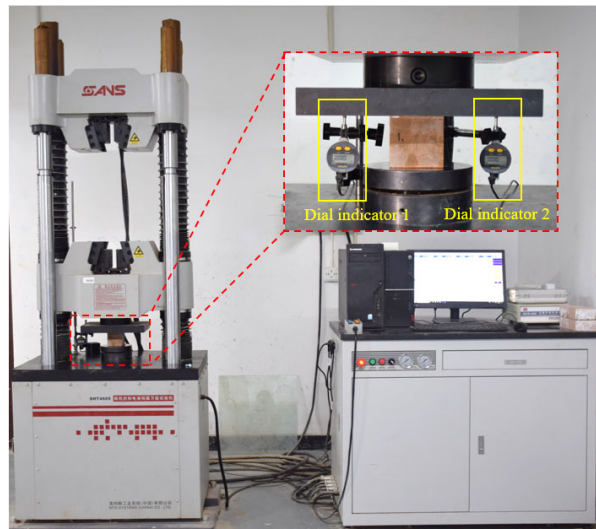


Fig. S3 The quasi-static uniaxial compression test system used in this study