

A simple model for the hysteretic elastic shear modulus of unsaturated soils

Cite this as: Jie XU, Chao ZHOU, 2016. A simple model for the hysteretic elastic shear modulus of unsaturated soils. *Journal of Zhejiang University-SCIENCE A (Applied Physics & Engineering)*, 17(7):589-596.

<http://dx.doi.org/10.1631/jzus.A1600300>



Background and objective

- ◆ **The elastic shear modulus G_0** (also referred as very small strain (less than 0.001%) shear modulus) of soil is an important parameter to predict ground deformation and the serviceability of many earth structures in geo-energy and geo-environmental engineering.
- ◆ **The principal objective** is to develop a simple model to capture the hysteretic G_0 of unsaturated soils with fewer parameters, considering the effects of mean net stress, suction, wetting-drying and void ratio.



Mathematical formulations

A semi-empirical equation is newly proposed for the elastic shear modulus G_0 of unsaturated soils:

$$G_0 = C_0 (1 + e)^{-3} \left[\left(\frac{p^*}{p_{\text{ref}}} \right)^{0.5} + C_s \xi^{0.5} \right]$$

The mean Bishop's stress $p^* = p + S_r s$ and the bonding variable $\xi = f(s)(1 - S_r)$ are adopted for considering the average skeleton force between soil particles and the additional normal forces provided by water menisci.

Verification of the simple model

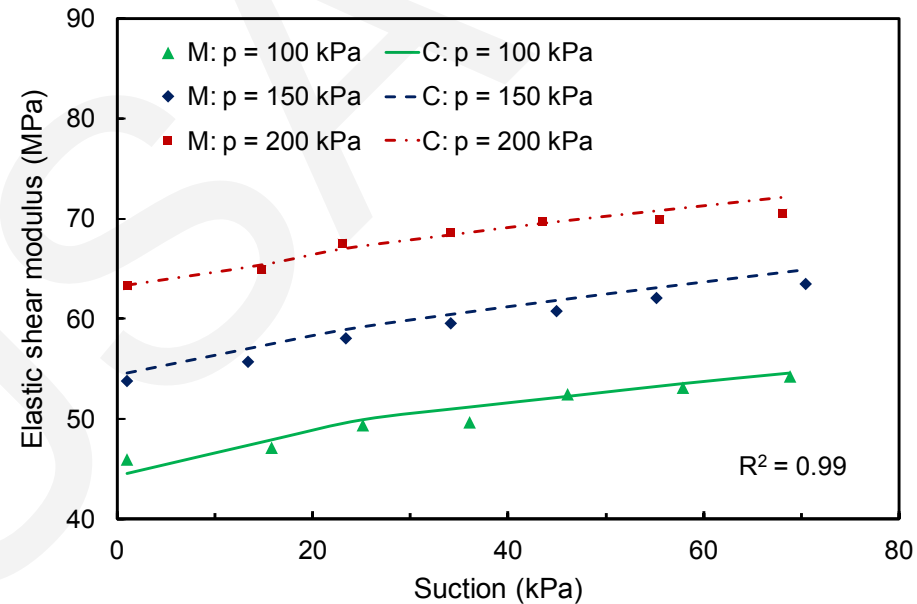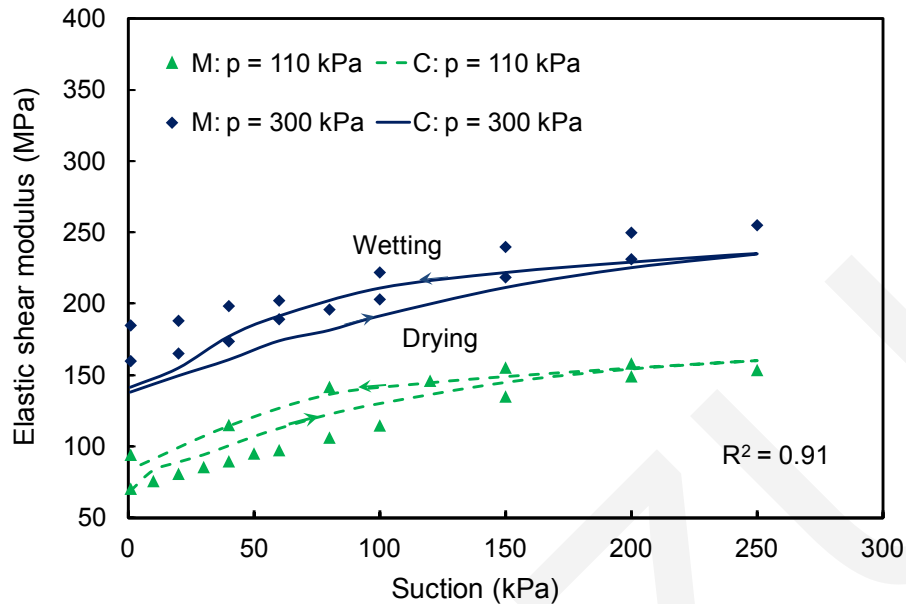

Comparisons between **measured** and **calculated** G_0 of compacted clayey silts tested by Ng et al. (2009) and Khosravi and McCartney (2012)

Conclusions

- ◆ **A simple semi-empirical model** is newly proposed for the hysteretic elastic shear modulus G_0 of unsaturated soils, requiring **only two parameters**.
- ◆ Comparisons between measured and calculated results demonstrate that the proposed equation is able to capture **the influences** of various factors on G_0 , including **mean net stress, suction, wetting-drying and void ratio**.